

FIAMM

Industrial Batteries

ENDURLITE

OPzS Bloc

Applications and Key Benefits

- + 6V and 12V OPzS blocs, designed for outstanding cycling performance in hard conditions
- Ideal for:
- IT and Telecom network operations
 - Power plants and power distribution
 - Emergency lighting and Security
 - Switchgear
 - Automation & Industrial backup power
 - Railway, Airport & Seaport signaling
 - Other applications in areas with unreliable power supply
- + Tubular positive plates
 - + Multi-cell design for easy and compact installation
 - + Dimensions according to DIN 40737 OPzS blocs, compatible with existing installations
 - + Outstanding cycling performance
 - + Suitable for use at elevated temperature and reliable operation in difficult conditions
 - + Optimized for deep discharge recovery DIN 43539T5
 - + Up to 15 years design life in float operation in temperature controlled environments
 - + 100% Recyclable

Applicable Standards

- DIN 40737 - specification OPzS blocs
- DIN 43539T5 - deep discharge
- IEC 60896 Part 11 - vented types requirements & tests

Manufacturing

- ISO 9001 Quality Management System
- ISO 14001 Environmental Management System

Technical Features

- Tubular positive plates with special low < 2% antimony lead alloy reduces loss of water (3-year topping-up intervals on float condition)
- Active material contained in polyester fiber gauntlet ensures extended long life
- Electrolyte: high purity sulphuric acid solution with 1.24 specific gravity at 20°C
- Pasted negative grid plates designed to have service lives consistent with the positive plates
- Separators with extremely high porosity and low internal resistance
- Container in impact and acid resistant SAN, designed for unsurpassed mechanical strength
- Translucent container for easy maintenance
- Lid in opaque SAN, sealed to the container
- Threaded female M10 terminal posts guarantee highest conductivity, maximum torque retention and easy installation
- High integrity post seal design to prevent electrolyte leakage and terminal corrosion
- Ceramic plugs filter electrolyte from escaping gasses
- Flame arrestors prevent errant sparks or flames from entering the battery (flashback)
- < 3% self-discharge per month at 20°C allows 6 months shelf life
- Installation in vertical position
- Flexible, fully insulated cable connectors with insulated screw with probe hole on the top for electrical measurement

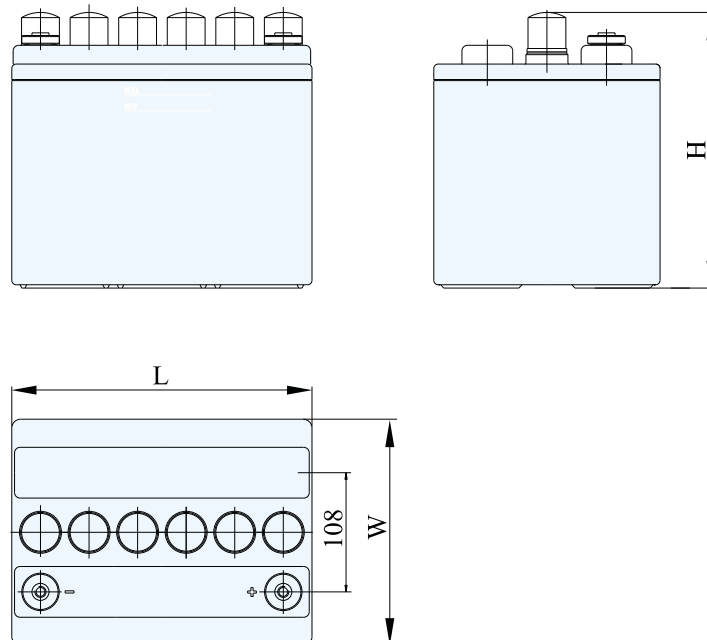


ENDURLITE**OPzS Bloc****FIAMM OPzS Bloc range**

DIN 40736	CAPACITY (Ah) at 20°C				IEC 896-11		WEIGHT (kg)		DIMENSIONS (mm)		
	10 hrs to 1.80 VPC	5 hrs to 1.77 VPC	3 hrs to 1.75 VPC	1 hrs to 1.67 VPC	INTERNAL RESISTANCE (mOhm)	SHORT CIRCUIT CURRENT (A)	without electrolyte	with electrolyte	Length	Width	Height
12V 1 OPzS 50	51	41	38	28	20	613	26	39	272	205	392
12V 2 OPzS 100	103	82	76	57	9.3	1290	38	50	272	205	392
12V 3 OPzS 150	154	123	114	85	6.9	1739	53	69	380	205	392
6V 4 OPzS 200	204	167	149	115	2.2	2703	36	47	272	205	392
6V 5 OPzS 250	255	209	187	144	1.9	3175	44	61	380	205	392
6V 6 OPzS 300	307	251	224	172	1.6	3846	52	68	380	205	392

Electrical Characteristics

- ✦ FLOAT VOLTAGE PER CELL: 2.23 - 2.25 Volts
- ✦ BOOST CHARGE: 2.35 - 2.40 V/cell
- ✦ SELF DISCHARGE: approx 3% per month at 20°C

Dimensions

FIAMM reserves the right to change or revise without notice any information or detail given in this publication
 OPzS Bloc_EMEA_2011_09_05

FIAMM S.p.A.
Industrial Batteries

dealer:
SINPEC UPS di Pecoraro Lino
 Registered Office: Via G. Deledda, 11/7
 33082 AZZANO DECIMO (PN) IT
 Commercial Office and Branch: Via Villafranca, 60
 33083 TAIEDO DI CHIONS (PN) IT
 P.IVA: IT 01752340933 R.E.A.101809
 mail: info@sinpec.eu tel. +39 0434 1696583

FIAMM
+

Industrial Batteries